

GRUNDFOS A WIDE RANGE


be
think
innovate

GRUNDFOS 



SQ, SQE

3" submersible pumps

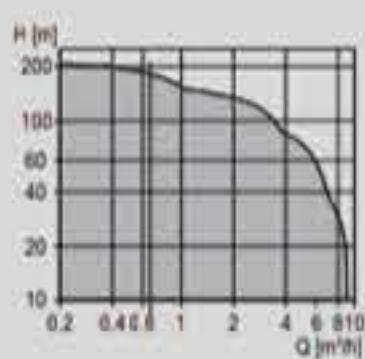

Technical data

Flow rate: max. 9 m³/h
Head: max. 237 m
Liquid temperature: 0 to 40 °C
Installation depth: max. 150 m

Applications

- Domestic water supply systems
- Groundwater supply to waterworks
- Irrigation in horticulture and agriculture
- Groundwater lowering
- Industrial applications.

Features and benefits

- Integrated dry-running protection
- Overload protection
- Overtemperature protection
- Over- and undervoltage protection
- Protection against upthrust
- Wear resistance
- Soft start
- High efficiency.


Options

- SQE can be protected, monitored and controlled by the CU 300 and CU 301.



SP A, SP, SP-G

4", 6", 8", 10", 12" submersible pumps

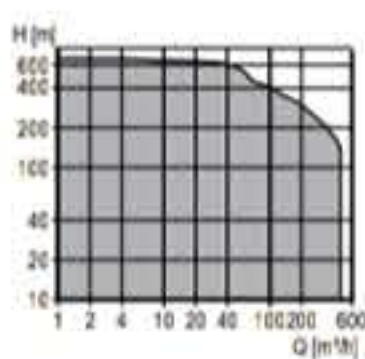

Technical data

Flow rate: max. 470 m³/h
Head: max. 670 m
Liquid temperature: 0 to 60 °C
Installation depth: max. 600 m

Applications

- Groundwater supply to waterworks
- Irrigation in horticulture and agriculture
- Groundwater lowering
- Pressure boosting
- Industrial applications
- Fountains
- Mining
- Offshore.

Features and benefits

- High efficiency
- Stainless steel components throughout and replaceable wear parts for long service life
- Sand content up to 150 g/m³.


Options

- A wide range of accessories
- Grundfos GO Remote, wireless remote control
- Complete range of zinc anodes for SP
- Complete range of flow sleeves for SP
- Available in 3 grades of stainless steel, EN 1.4301, EN 1.4401 or EN 1.4539
- Motor protection via MP 204.



SQE-NE, SP-NE

Remediation and sampling pumps

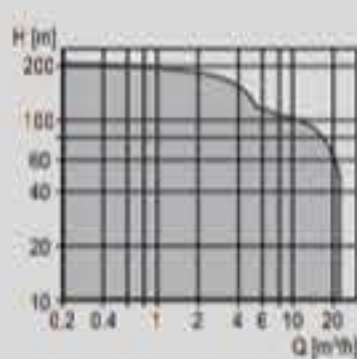

Technical data

Flow rate: max. 22 m³/h
Head: max. 215 m
Liquid temperature: 0 to 40 °C
Installation depth: max. 600 m

Applications

- Pumping contaminated groundwater
- Sampling
- Remedial pumping.

Features and benefits

- SQE-NE: See SQE
- SP-NE: See SP.

be think innovate